

E600 Series
ELECTRIC ARTICULATING BOOM LIFTS

Clean and Green, 60-ft Machine.

The E600 Series gives you the most height in an electric powered boom lift. With four configurations, you can choose from electric or multi-power, standard articulating or articulating with JibPLUS.®

You can work on slab or off, without hesitation with the non-marking all-terrain tires. With the Automatic Traction Control, optional all-wheel drive and standard oscillating axle, you won't need to be shy about travelling over rough terrain.

Whether your jobs include industrial applications, maintenance, construction, or anything in between, the E600 Series delivers with zero emissions and reduced noise levels.



Distributed By:




www.onesourcerental.com



E600 Series
ADVANTAGES

- Over 43 ft of horizontal outreach.
- Zero emissions and quiet operation.
- Quick recharge time with multi-power system.
- Low gross vehicle weight of 15,000 lb (6,804 kg).
- Standard oscillating axle and all-wheel drive.



	E600J	M600J	E600JP	M600JP
E/M600 Electric Boom Series				
Platform Height	60 ft 3 in. (18.36 m)	60 ft 3 in. (18.36 m)	60 ft 4 in. (18.39 m)	60 ft 4 in. (18.39 m)
Platform Capacity—Unrestricted	500 lb (227 kg)	500 lb (227 kg)	500 lb (227 kg)	500 lb (227 kg)
Horizontal Outreach	43 ft 3 in. (13.18 m)	43 ft 3 in. (13.18 m)	44 ft 5 in. (13.54 m)	44 ft 5 in. (13.54 m)
Overall Width	7 ft 11 in. (2.41 m)	7 ft 11 in. (2.41 m)	7 ft 11 in. (2.41 m)	7 ft 11 in. (2.41 m)
Weight	15,200 lb (6,895 kg)	15,500 lb (7,031 kg)	15,750 lb (7,144 kg)	16,050 lb (7,280 kg)
Power Source	48V DC, 8 x 6V 415 amp-hr	48V DC, 8 x 6V 415 amp-hr	48V DC, 8 x 6V 415 amp-hr	48V DC, 8 x 6V 415 amp-hr
Generator Set—M models		45 amp Diesel Kubota		45 amp Diesel Kubota


Available Options

30 x 48 in. (0.76 x 1.22 m) Platform	•	•	•	•
Fall Arrest Platform 36 x 72 in. (0.91 x 1.83 m)	•	•	•	•
Mesh to Top Rail Bolt-on Aluminum	•	•	•	•
Soft Touch System 6 ft Platform Padding (30 x 72 in. Platform)	•	•	○	○
1/2 in. Air Line to Platform	•	•	•	•
Foam-Filled Tires	•	•	•	•
1200 Watt Inverter	•	•	•	•
Hostile Environment Kit ¹	•	•	•	•
UL® EE Rating	•	○	•	○
Tow Package ²	•	•	•	•
Light Package ³	•	•	•	•
Platform Worklights	•	•	•	•
Flashing Amber Beacon	•	•	•	•

1. Includes console cover, boom wipers and cylinder bellows. 2. 2WD only. 3. Includes head and tail lights and platform work lights.

Main Features

- The world's first and only 60-foot Electric Boom—Indoor and outdoor versatility.
- Indoor advantages—Zero emissions, industry-leading noise reduction, non-marking tires and the lowest weight in its class.
- Outdoor advantages—Rugged design with all-wheel drive, automatic traction control and oscillating axle.
- Available with 45 amp Kubota diesel-powered generator to maintain battery charge level during extended outdoor use.

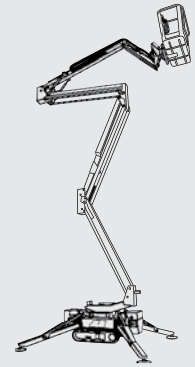

	X390AJ	X550AJ	X700AJ
Compact Crawler Series Boom Lifts			
Platform Height	39 ft 2 in. (11.9 m)	55 ft (16.76 m)	64 ft 7 in. (21.2 m)
Platform Capacity	440 lb (200 kg)	440 lb (200 kg)	440 lb (200 kg)
Horizontal Reach	22 ft (6.7 m)	21 ft (6.4 m)	69 ft 7 in. (21.2 m)
Overall Width	31 in. (77 cm)	31 in. (77 cm)	39 in. (99 cm)
Weight	3,682 lb (1,670 kg)	4,630 lb (2,098 kg)	6,592 lb (2,990 kg)
Power Source			
Gasoline Engine	Honda GX270 9 hp (6.7 kW) Honda iGX390 13 hp (9.7 kW)	Honda iGX440 15 hp (11.1 kW)	Honda iGX440 15 hp (11.1 kW)
Diesel Engine	Hatz 1B30 7 hp (5.22 kW)	Hatz 1B40 10 hp (7.46 kW)	Perkins 402.05 14 hp (10.44 kW)
Electric Engine	90Ah 48V Lithium-Ion	90Ah 48V Lithium-Ion	90Ah 70V Lithium-Ion

*Certain options of country standards increase weight. Preliminary specifications -- consult factory for details.

Main Features

- Low weight and rubber tracks for enhanced maneuverability and accessibility.
- Compact design increases ease of transport.
- Electric and combustion combination power for efficient energy usage.



	T20E*	T26E	E33MJ
Toucan Series Mast-Style Boom Lifts			
Platform Height	20 ft 2 in (6.14 m)	26 ft 5 in. (8.1 m)	32 ft 9 in. (9.98 m)
Platform Capacity—Unrestricted	500 lb (227 kg)	500 lb (227 kg)	500 lb (227 kg)
Horizontal Reach	6 ft 6.7 in (1.99 m)	8 ft 8 in. (2.64 m)	14 ft 6 in. (4.42 m)
Overall Width	39 in. (99 cm)	45 in. (114 cm)	47.2 in. (120 cm)
Weight	5,360 lb (2,431 kg)	6,834 lb (3,100 kg)	11,574 lb (5,250 kg)
Power Source	24V DC 225 amp-hr	24V DC 240 amp-hr	24V DC 930 amp-hr

Available Options

1/2 in. Air Line to Platform	•	○	○
Platform Worklights	•	•	•

*Coming mid 2011

Main Features

- Versatile articulating jib provides up to 14 ft 6 in. (4.42 m) up and over reach.
- 360-degree rotating mast for unmatched positioning capabilities.
- Capacity for two workers and supplies.
- Drive through doorways and narrow aisles.
- Navigate around multiple obstacles on the ground and in the air.