

Model

Tow-Pro® Series

TRAILER MOUNTED BOOM LIFTS



Features

Telescopic Upper Boom
4 ft (1.22 m) Jib (T500J Only)
Platform, Side Entry: 30 x 48 in. (0.76 x 1.22 m)
Proportional Controls
110V-AC Receptacle in the Platform
Auto-Leveling Hydraulic Outriggers
Motion Alarm
Tilt Alarm/Indicator Light
Hourmeter
Four 6V 220 Amp-Hour Batteries
Battery Condition Indicator
Parking Brake
Combination Hitch with Adjustable Height Coupler
Standard Air and Water Lines to Platform

Accessories & Options

Platform Rotator
Material Hook — 500 lb (227 kg) Capacity
Drive and Outrigger Set
Platform Mounted Glass/Panel Tray
Non-Marking Outrigger Pads
Full-Size Spare Tire
Flashing Amber Beacon
2500 Watt Honda Generator



Distributed By:



www.onesourcerental.com



Increased Productivity

- Easy to transport with a standard combination hitch and 65 mph (105 kmph) rated towing speed
- Easier to set up with hydraulic auto-leveling outriggers
- Platform controls with one-hand operation of boom functions
- Optional Drive and Set from platform
- Accessory-mounting tray for customer-provided generator, air compressor or pressure washer

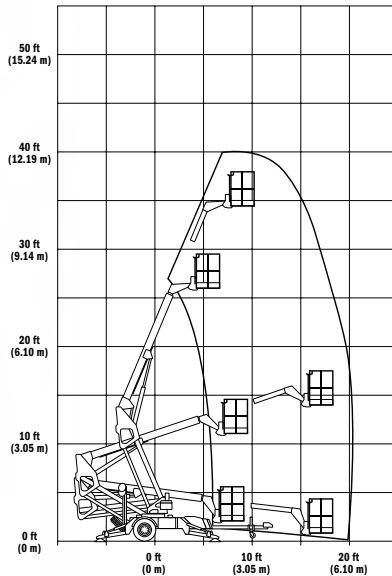
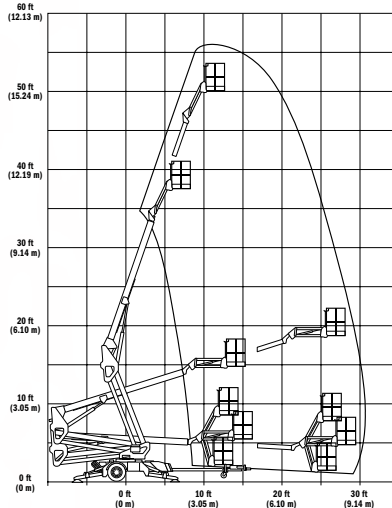
Increased Versatility

- Ideal for a wide variety of jobs — residential construction, gutter cleaning, tree trimming, pressure washing, decorating, lighting, painting and remodeling

Tow-Pro® Series

TRAILER MOUNTED BOOM LIFTS

Specifications

T350

T500J

Reach

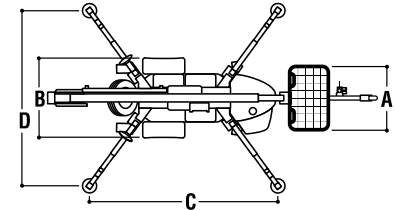
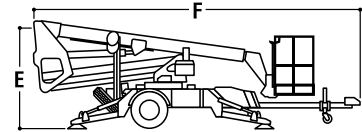
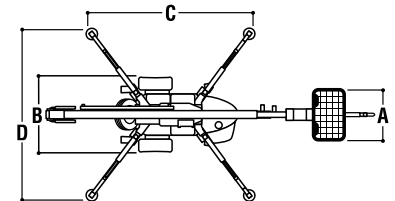

Platform Height	
T350	34 ft 5 in. (10.5 m)
T500J	50 ft 9.5 in. (15.3 m)
Horizontal Outreach	
Working Outreach	
T350	20 ft 2 in. (6.15 m)
T500J	31 ft 6 in. (9.6 m)
Centerline to Platform Edge	
T350	18 ft 9.5 in. (5.7 m)
T500J	29 ft 6 in. (9 m)
From Outrigger Pad Edge	
T350	13 ft 6 in. (4.11 m)
T500J	23 ft 5 in. (7.14 m)
Up and Over Height	
T350	15 ft (4.57 m)
T500J	18 ft (5.49 m)
Swing	410° Non-Continuous
Platform Capacity	500 lb (227 kg)
Platform Capacity w/Rotator	440 lb (200 kg)
Material Hook Capacity	500 lb (227 kg)
Platform Rotator (Optional)	90° Manual
Jib Length (T500J only)	4 ft (1.22 m)
Jib Vertical Motion (T500J only)	130 degrees (+75, -55)

Dimensions

A. Platform Size	30 x 48 in. (0.76 x 1.22 m)
B. Overall Width	
T350	4 ft 11 in. (1.5 m)
T500J	5 ft 8.25 in. (1.8 m)
C. Outrigger Footprint—Length	
T350	11 ft 6 in. (3.51 m)
T500J	12 ft 3.75 in. (3.8 m)
D. Outrigger Footprint—Width	
T350	10 ft 5 in. (3.18 m)
T500J	12 ft 7.75 in. (3.9 m)
E. Stowed Height	6 ft 7.25 in. (2.0 m)
F. Stowed Length	
T350	21 ft 4 in. (6.5 m)
T500J	27 ft 3.75 in. (8.3 m)
Entry Height—Extended	
T350	10 in. (25.4 cm)
T500J	15 in. (38 cm)
Weight	
T350	3,400 lb (1,542 kg)
T500J	4,800 lb (2,177 kg)
Leveling Capability	11°
Chassis	
Towing Speed Rating	65 mph (105 kmph)
Tongue Weight	
T350	242 lb (110 kg)
T500J	350 lb (159 kg)
Tire Size/Type	
T350	205/75 R14 Pneumatic
T500	225/75 R15 Pneumatic

Power Source

DC Power	24V DC 24V DC
Batteries	4 x 6V 220 amp-hr
Gasoline Engine (Optional)	Honda GX 270—9 hp

T350

T500J


The JLG "1 & 5" Warranty

JLG Industries, Inc. backs our 450 Series II boom lifts with our exclusive "1 & 5" Warranty. We provide coverage for one (1) full year, and cover all specified major structural components for five (5) years. These machines meet or exceed applicable OSHA Regulations in 29 CFR 1910.67, 29 CFR 1926.453, ANSI A92.5-2006 and CSA standard B354.4-02 as originally manufactured for intended applications. We reserve the right to make price, specification, and/or equipment changes without prior notification.


JLG Industries, Inc.

1 JLG Drive
 McConnellsburg, PA 17233-9533
 Telephone 717-485-5161
 Toll-free in US 877-JLG-LIFT
 Fax 717-485-6417
www.jlg.com

An Oshkosh Corporation Company

Distributed By:



www.onesourcerental.com

Form No.: B-TPB-0105-10M
 Part No.: 3133001
 R100503
 Printed in USA