

# CST™ 280

Issued Feb. 2011 • Index No. DC/29.55

Stick/TIG Welding  
Power Source 

## Quick Specs

### Industrial Applications

Power Plant Construction  
Petrochemical Construction  
Maintenance and Repair  
Shipbuilding

### Processes

Stick (SMAW)  
TIG (GTAW) Lift-Arc

**Input Power** Requires 3- or 1-Phase Power

**Amperage Range** 5–280 A

**Max. Open-Circuit Voltage** 77 V

**Weight** 41 lb (18.6 kg)

## The Power of Blue.®

Distributed By: One Source Equipment Rentals [www.onesourcerental.com](http://www.onesourcerental.com)

**Superior Stick arc performance** even on the difficult-to-run electrodes like E6010.

**Adaptive Hot Start™ for Stick arc starts** automatically increases the output amperage at the start of a weld should the start require it. Prevents the electrode from sticking and creating an inclusion.

**Lift-Arc™ start** provides TIG arc starting without the use of high frequency.

**Easy to install** with a new switch on the outside of the package, the machine can be changed between low and high input voltage ranges. Also, since the switch is on the back, input voltages can be changed without removal from inverter racks.



**Optional 4- or 8-pack racks** are available for multiple operator applications. These are commonly used in construction and shipyard applications. All CST controls including the power switch are located on front of the machine for easy access.

**Portable** in the shop or at the job site — at 41 lb the CST 280 is easily moved from location to location.

**Remote amperage control** provided through 14-pin receptacle on front of the machine. This permits use of standard remote amperage control devices.

**Tweco® or Dinse-style connectors** are available on the CST 280.

**6-ft power cable included.**

**TRUE BLUE®**  
3YR. WARRANTY

Power source is warranted for 3 years, parts and labor.  
Original main power rectified parts are warranted for 5 years.

MADE IN **USA**  
APPLETON, WI **USA**



**Miller Electric Mfg. Co.**  
An Illinois Tool Works Company  
1635 West Spencer Street  
Appleton, WI 54914 USA

**Equipment Sales US and Canada**  
Phone: 866-931-9730  
FAX: 800-637-2315  
International Phone: 920-735-4554  
International FAX: 920-735-4125

**Web Site**  
[www.MillerWelds.com](http://www.MillerWelds.com)



# Specifications (Subject to change without notice.)



Description	Welding Mode	Input Power	Rated Output	Welding Amperage Range	Max. Open-Circuit Voltage	Amps Input at Rated Load Output, 50/60 Hz								KVA	KW	Dimensions	Net Weight
						208 V	220 V	230 V	400 V	440 V	460 V	575 V					
CST 280, 220-230/460-575 V Dinse	Stick (SMAW)	Three-Phase	280 A at 31.2 V, 35% Duty Cycle	5-280 A	77 VDC	—	35	34.2	—	—	17.8	14.7	14.6	10.2	H: 13-1/2 in (343 mm) W: 7-1/2 in (191 mm) D: 18 in (457 mm)	41 lb (18.6 kg)	
			—			23.3	22.5	—	—	11.7	9.7	9.6					6.4
	TIG (GTAW)	200 A at 28 V, 100% Duty Cycle	—			43.9	43	—	—	—	10.1		6.6				
		150 A at 26 V, 100% Duty Cycle*	—			32.7	32	—	—	—		7.3		4.6			
CST 280, 208-230/400-460 V Dinse	Stick (SMAW)	Three-Phase	280 A at 31.2 V, 35% Duty Cycle	5-280 A	67 VDC	36	33	22.8	19.8	18	17.5		—		14	10.2	H: 13-1/2 in (343 mm) W: 7-1/2 in (191 mm) D: 18 in (457 mm)
			200 A at 28 V, 100% Duty Cycle			23.5	23	22.8	13.5	12	12.7	—	10.2	6.9			
	TIG (GTAW)	200 A at 28 V, 50% Duty Cycle*	43.9			43.3	43	—	—	—	9.9	6.5					
		150 A at 26 V, 100% Duty Cycle*	35			33.9	32.9	—	—	—			7.6	4.8			


\*Output ratings on 230 V single-phase are reduced to comply with CSA current limitation on input power cable.

CSA approval. 1P23M approval.

Distributed By: One Source Equipment Rentals [www.onesourcerental.com](http://www.onesourcerental.com)


## Control Panel

1. Output Light
2. On/Off Switch
3. Weld Process Selector Switch
4. Overtemp Light
5. Amperage Adjustment Control (5-280 Amps)

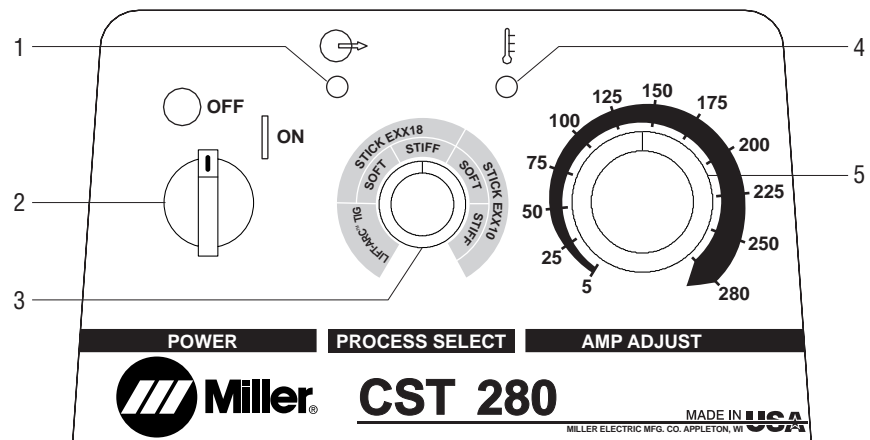


## Performance Data

DUTY CYCLE CHART

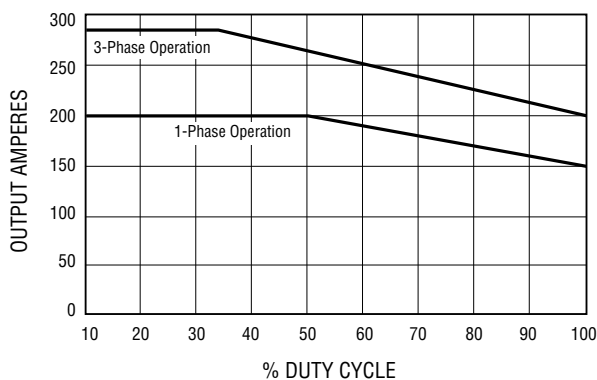

VOLT/AMP CURVE AT 150 AMPS

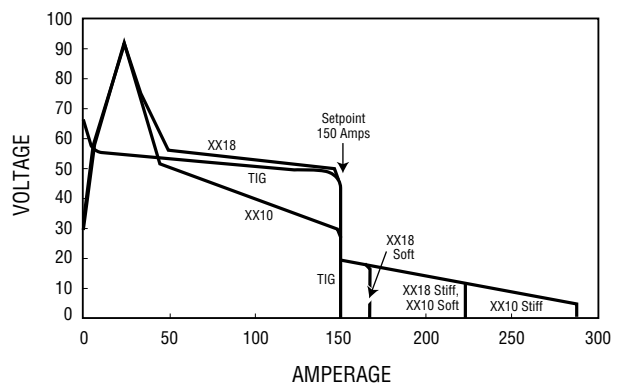

# Genuine Miller Accessories

## TIG (GTAW) Torches



### Weldcraft® TIG Torches

The Weldcraft line of TIG torches complements the most popular TIG power source line available today. The Weldcraft torch line includes both air-cooled and water-cooled models. Available with genuine Weldcraft parts.

**#WP-17V-12-2** 150 A, 12 ft (3.7 m) air-cooled torch with valve, two-piece cable.

**#WP-17V-25-2** 150 A, 25 ft (7.6 m) torch with valve, two-piece cable.

**#WP-26V-12-2** 200 A, 12 ft (3.7 m) air-cooled torch with valve.

**#WP-26V-25-2** 200 A, 25 ft (7.6 m) air-cooled torch with valve.

*These two-cable TIG torches require the installation of a Dinse-Style Connector (#042 418) or Tweco-Style Connector (#191 981) depending on the CST model connector type.*

## Remote Controls



### RCC-14 Remote Contactor and Current Control\* #151 086 14-pin plug

Side-to-side rotary-motion fingertip control fastens to TIG torch using two Velcro® straps. Great for production or contractors that need quick ramp-up. Includes 26.5 ft (8 m) control cord.



### RCCS-14 Remote Contactor and Current Control\* #043 688 14-pin plug

Up-and-down rotary-motion fingertip control fastens to TIG torch using two Velcro® straps. Great for applications that require a finer amperage control. Includes 26.5 ft (8 m) control cord.



### RHC-14 Hand Control\*

**#242 211 025** 25 ft (7.6 m)  
**#242 211 050** 50 ft (15.2 m)  
**#242 211 100** 100 ft (30.5 m)  
 Miniature hand control for remote current and contactor control. Dimensions: 4 x 4 x 3-1/4 in (102 x 102 x 82 mm). Includes cord and 14-pin plug.



### RPBS-14 Remote Control #300 666

Attaches to the TIG torch to remotely start and stop TIG welding process.



### RFCS-14 Foot Control\* #043 554

Foot pedal provides remote current and contactor control. Includes 20 ft (6 m) cord and 14-pin plug.



### RFCS-14 HD Foot Control\* #194 744

For all Miller solid-state power sources after serial number JK674521. This new design increases

stability with a larger base, and durability with a heavier cord. Maximum flexibility is accomplished with a reconfigurable cord that can exit the front, back or either side of the pedal. Foot pedal provides remote current and contactor control. Includes 20 ft (6 m) cord and 14-pin plug.



### Wireless Remote Foot Control\* #300 429

For remote current and contactor control. Receiver plugs directly into

the 14-pin receptacle of Miller machine. 90 ft (27.4 m) operating range.



### Wireless Remote Hand Control\* #300 430

For remote current and contactor control. Receiver plugs directly into the 14-pin receptacle of Miller

machine. 300 ft (91.4 m) operating range.

*\*The remote controls provide amperage control only on the CST 280, no remote contactor control.*

Distributed By: One Source Equipment Rentals [www.onesourcerental.com](http://www.onesourcerental.com)

## Cable Connectors and Adapters

*Note: The Dinse version of the CST 280 includes one set of male connectors. The Tweco version does not.*

### Dinse-Style Connector #042 418

Accepts #4 AWG to #1/0 cable size. Required if male plugs shipped with power source must be replaced or if additional plugs are needed. Kit includes one Dinse-style male plug which attaches to the work and/or weld cables and plugs into the Dinse-style receptacles on the power source.

### Extension Kit for Dinse-Style Cable Connectors #042 419

Accepts #4 AWG to #1/0 size cable. Used to adapt or extend weld and/or work cables. Kit includes one male Dinse-style plug and one in-line female Dinse-style receptacle.



### Dinse/Tweco® Adapter #042 465

A one-piece adapter which has a Dinse-style male plug (to power source) on one end and a female Tweco receptacle (for weld cable connection) on other end.



### Dinse/Cam-Lok Adapter #042 466

A one-piece adapter which has a Dinse-style male plug (to power source) on one end and a Cam-Lok receptacle (for weld cable connection) on other end.



### Tweco/Dinse Adapter #210 061

A one-piece adapter which has a Tweco-style male plug (to power source) on one end and a female Dinse-style receptacle (for weld cable connection) on other end.



### Tweco-Style Connector #191 981

Accepts 1/0 to 2/0 size cable. Kit includes one Tweco-style male plug which attaches to the work and/or weld cables and plugs into the receptacle on the power source.

# CST™ 280 Rack (See Index No. DC/18.82 for additional information.)



Shown with optional running gear.

- The rack provides a simple means of protecting and transporting welding power sources for construction, power plant turn-arounds and shipbuilding applications.
- The CST™ 280 Rack's low weight (340 lb fully loaded) enables use of elevators to move rack.
- Top cover to protect the machines from falling debris.
- Meets NEC requirements with appropriate fuses.
- Lift truck side and end fork pockets.
- Lifting eye simplifies transportation using crane or overhead lifting device.
- One main disconnect box with fused circuit breaker switches for each machine.
- Common output ground connection (for same polarity use only).
- CSTs can be paralleled for Air Carbon Arc cutting.
- Running Gear (optional).

## CST Rack Specifications (Subject to change without notice.)

Power Source	Input Power to Rack	Capacity	Dimensions	Net Weight
CST 280	220–230/460–575 VAC, 50/60 Hz, 3-Phase	4	H: 50-3/4 in (1289 mm) 4-Pack W: 25-1/2 in (648 mm)	355 lb (161 kg)
		8	8-Pack W: 46 in (1165 mm) D: 26-1/2 in (673 mm)	640 lb (290 kg)

## Ordering Information

\*The Dinse version of the CST 280 includes one set of male connectors. The Tweco version does not.

Power Source and Options	Stock No.	Description	Qty.	Price
CST™ 280 w/ Dinse-style connectors*	#907 244	220–230/460–575 VAC, 50/60 Hz		
CST™ 280 w/ Tweco-style connectors*	#907 244-01-1	220–230/460–575 VAC, 50/60 Hz		
CST™ 280 w/ Dinse-style connectors*	#907 251	208–230/400–460 VAC, 50/60 Hz		
CST™ 280 w/ Tweco-style connectors*	#907 251-01-1	208–230/400–460 VAC, 50/60 Hz		
CST™ 280 w/ Dinse-style connectors*	#907 251-01-2	208–230/400–460 VAC, 50/60 Hz with VRD capability		
<b>Power Source Racks and Options</b>				
CST™ 280 Rack w/ Dinse-style connectors*	#907 245	Rack with 4 CST 280, 220–230/460–575 VAC (Includes 25 A fuses for 460 V)		
CST™ 280 Rack w/ Tweco-style connectors*	#907 247	Rack with 4 CST 280, 220–230/460–575 (Includes 25 A fuses for 460 V)		
CST™ 280 Rack w/ Tweco-style connectors*	#907 365	Rack with 8 CST 280, 220–230/460–575 (Includes 25 A fuses for 460 V)		
CST™ 280 Rack w/ Dinse-style connectors, VRD*	#907 246	Rack with 4 CST 280, 220–230/400–460 VAC, with VRD capability		
Running Gear for Rack	#195 114 #195 436	For 4-pack rack For 8-pack rack		
Fuse	#199 795 #212 541	30 amp fuse for 220 or 230 V input (Order 12 per 4-pack rack or 24 per 8-pack rack) 20 amp fuse for 575 V input (Order 12 per 4-pack rack or 24 per 8-pack rack)		
<b>Weldcraft® TIG Torches</b>				
		See page 3		
<b>Remote Controls</b>				
RCC-14	#151 086	Remote current side-to-side rotary control		
RCCS-14	#043 688	Remote current up and down rotary control		
RHC-14		See page 3. Remote current hand control		
RPBS-14	#300 666	TIG welding on/off remote switch		
RFCS-14	#043 554	Remote current foot pedal control		
RFCS-14 HD	#194 744	Heavy-duty remote current foot pedal control		
Wireless Remote Foot Control	#300 429	Remote current foot control with wireless 90 ft (27.4 m) operating range		
Wireless Remote Hand Control	#300 430	Remote current hand control with wireless 300 ft (91.4 m) operating range		
Extension Cables for 14-Pin Remote Controls	#242 208 025 #242 208 050 #242 208 080	25 ft (7.6 m) 50 ft (15.2 m) 80 ft (24.4 m)		
<b>Cable Connectors and Adapters</b>				
Dinse-Style Connector	#042 418	#4 AWG to #1/0 cable size		
Extension Kit for Dinse-Style Connector	#042 419	#4 AWG to #1/0 cable size		
Dinse/Tweco® Adapter	#042 465	One-piece adapter with Dinse-style male plug and Tweco-style female receptacle		
Dinse/Cam-Lok Adapter	#042 466	One-piece adapter with Dinse-style male plug and Cam-Lok receptacle		
Tweco/Dinse Adapter	#210 061	One-piece adapter with Tweco-style male plug and Dinse-style female receptacle		
Tweco-Style Connector	#191 981	1/0 to 2/0 cable size		

Date:

Total Quoted Price:

Distributed by:

Distributed By:



www.onesourcerental.com