

## NEW: HS TRASH PUMPS



**New! 3-inch discharge**


**Durable trash pumps in two sizes**—a 1HP 3-inch discharge and a 1/2HP 2-inch discharge. Both designed to pump sand, solids and debris with minimal wear and clogging.

### HS Features

- Built-in shaft mounted agitator suspends solids.
- Urethane Semi Vortex Impeller for maximum durability and pump performance.
- Double Inside Mechanical Seal With SiC faces provides longest operational life.
- Oil Lifter provides lubrication of the seal faces. (Patent Pending)
- V-Ring Seal Protector protects mechanical seal from abrasive particles.

### Optional Accessories

- Vertical Discharge Coupling.
- 2-inch NPT coupling available for HS3.75S-61.

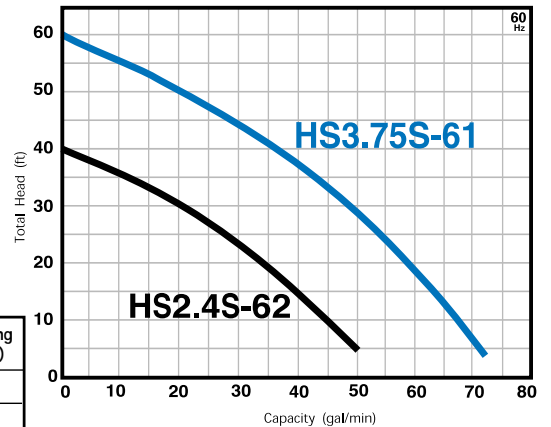

Model	Discharge Bore (inch)	Ship Weight (lb.)	Cable Length (ft.)	Dimensions (inch)		Continuous Running Water Level (inch)
				Diameter	Height	
HS2.4S-62	2	25	20	10	13	3 1/2
HS3.75S-61	3	42	32	12 1/2	15 1/4	3 1/2

Distributed By:

One Source Equipment Rentals

[www.onesourcerental.com](http://www.onesourcerental.com)

## NEW: HSZ AUTOMATIC TRASH PUMP




**Automatic trash pumps in two sizes**, designed to pump sand, solids and debris with minimal wear and clogging.

### HSZ Features

- Built-in shaft mounted agitator suspends solids.
- Urethane Semi Vortex Impeller for maximum durability and pump performance.
- Double Inside Mechanical Seal With SiC faces provides the longest operational life.
- Oil Lifter provides lubrication of the seal faces. (Patent Pending)
- V-Ring Seal Protector protects mechanical seal from abrasive particles.

### Optional Accessories

- Vertical Discharge Coupling.
- 2-inch NPT coupling available for HSZ3.75S-61.

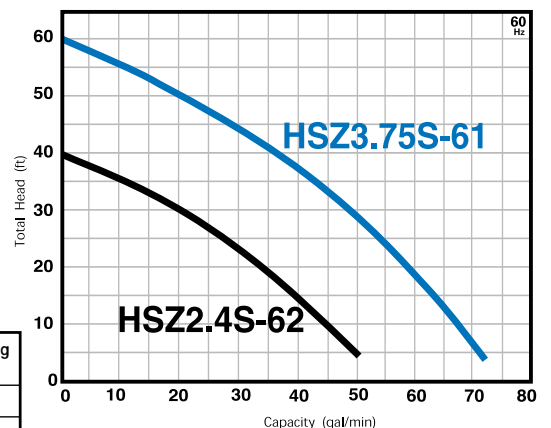

Model	Discharge Bore (inch)	Ship Weight (lb.)	Cable Length (ft.)	Dimensions (inch)		Continuous Running Water Level (inch)
				Diameter	Height	
HSZ2.4S-62	2	25	20	10	13	3 1/2
HSZ3.75S-61	3	42	32	12 1/2	15 1/4	3 1/2